

GE APPLIANCES

# RealMAX™

ATMOSPHERIC GAS WATER HEATERS

2022 PRODUCT GUIDE



GE APPLIANCES  
a Haier company

**AIR&WATER**  
SOLUTIONS



# GE APPLIANCES RealMAX™ HAS ARRIVED— BRINGING THE GE APPLIANCES ADVANTAGE WITH IT

The atmospheric gas water heaters in the GE RealMAX™ series are cutting-edge products that give families true capacity and plenty of hot water\*, and give professionals the kind of support that only GE Appliances can offer. With a distribution network second to none and a training and customer-service team dedicated to making your life easier, RealMAX™ is a game changer.


\* Based on internal testing

# GE RealMAX™ ATMOSPHERIC GAS WATER HEATERS: MAXIMUM BENEFITS




**A BRAND WITH A HERITAGE**

Consumers know and trust GE Appliances for durability, quality, and innovation.

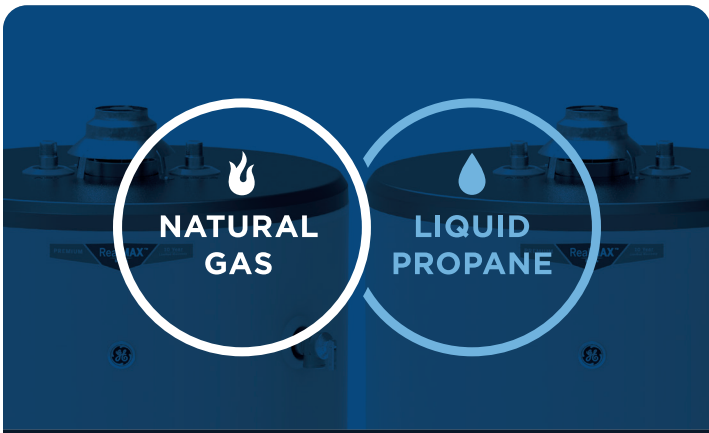


**A CHOICE OF POWER SOURCES**

Natural gas or liquid propane.



## MAXIMUM CAPACITY AND PERFORMANCE

A true 30, 40, and 50 gallons of hot water. 40K BTUs on select 40- and 50-gallon natural gas units provide quick recovery and very high performance.\*



## MAXIMIZED DISTRIBUTION NETWORK

GE Appliances' unparalleled network offers maximized supply-chain efficiencies.



## SUPPORT TO THE MAX

Our commitment to the industry means that we want you to succeed — and through top-notch customer support and training, we aim to be your partner for the long haul.

\* Based on internal testing

## INNOVATION TO THE MAX



GE Appliances' investment in the future includes a \$60 million, 259,000-square-foot, high-volume water heater production facility in Camden, South Carolina. It's the first new tank-style water heater plant built in the U.S. in more than 30 years, and it's driven by cutting-edge technology. RealMAX™ water heaters and allied products will be made in the USA\*, by GE Appliances experts, in this state-of-the-art facility.

\* 70-90% US content





## TANK FEATURES

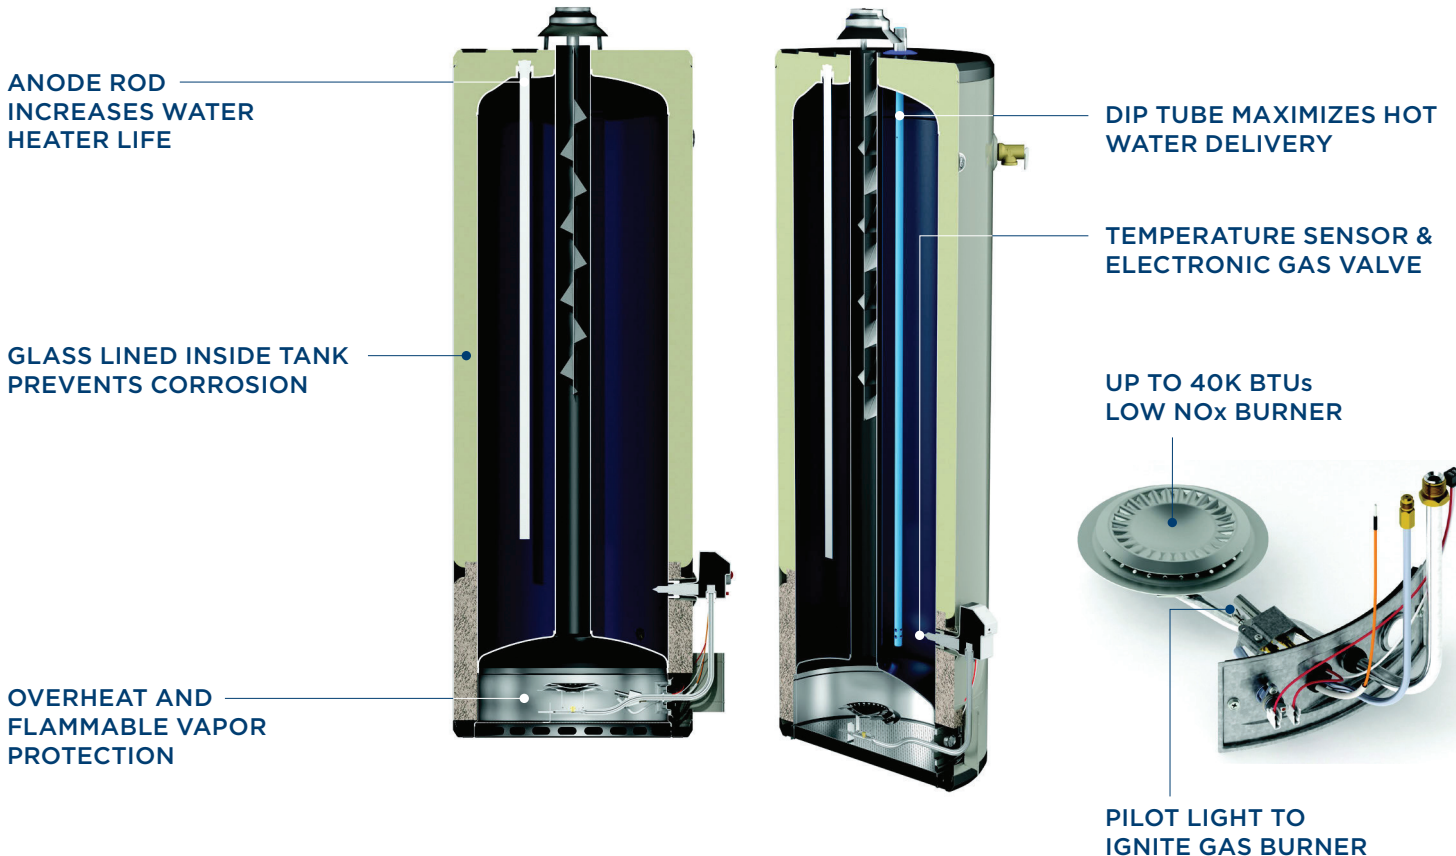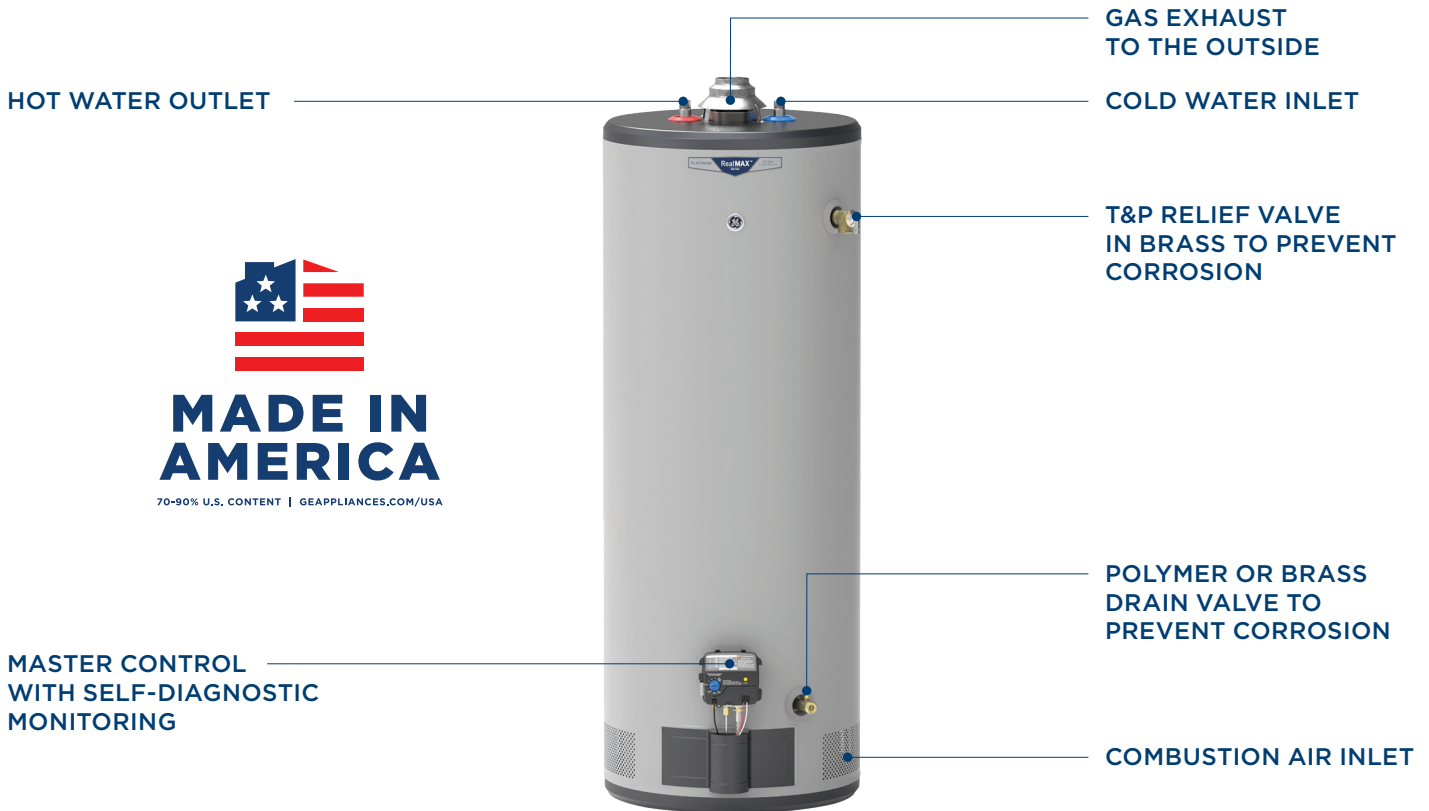

## ATMOSPHERIC GAS FEATURE HIGHLIGHTS



### CAPACITY, HEAT & RECOVERY

The products in the RealMAX™ series are real-capacity heaters – they actually contain the water volume they claim to. They hold a true 30, 40 and 50 gallons of water – plus quick recovery (40K BTUs on select 40/50G natural gas units).



### CONTROLS DESIGNED FOR PEACE OF MIND

RealMax™ series water heaters have safety built in. The SmartShield™ system automatically shuts off the unit if abnormal ambient temperatures are detected, and the self-diagnostic feature reports on gas system status via an LED indicator.



### BUILT-TO-LAST WARRANTIES

RealMAX™ water heaters carry tank and parts limited warranties of 8 years (Choice model), 10 years (Premium model), and 12 years (Platinum model). Compare that with most standard warranties, which run 6, 9, and 12 years.

# ATMOSPHERIC GAS SPECIFICATIONS

## GE REALMAX ATMOSPHERIC NATURAL GAS WATER HEATERS



	GE					
	GG30S08BXR	GG30T08BXR	GG40S12BXR GG40S10BXR GG40S08BXR	GG40T12BXR GG40T10BXR GG40T08BXR	GG50S10BXR GG50S08BXR	GG50T12BXR GG50T10BXR GG50T08BXR
Rated capacity (gallons)	30	30	40	40	50	50
Nominal capacity (gallons)	30	30	40	40	50	50
<b>FEATURES</b>						
Family size*	1-3	2-3	2-4	2-4	3-5+	3-5+
Control type	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Self-diagnostic control	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED
Temperature setting	45-160° F Range	45-160° F Range	45-160° F Range	45-160° F Range	45-160° F Range	45-160° F Range
Temperature setting factory default	120° F	120° F	120° F	120° F	120° F	120° F
Drain valve type	Polymer	Polymer	Brass Polymer Polymer	Brass Polymer Polymer	Polymer Polymer	Brass Polymer Polymer
<b>WEIGHTS &amp; DIMENSIONS</b>						
Approx. shipping weight (lbs.)	118	119	140	147	172	169
Height to water connection (in.)	47-1/5	58-1/5	49-1/4	58-9/10	46-2/3	58-1/3
Tank dimensions (diameter x height) (in.)	20 x 45-1/2	18 x 56-1/2	22 x 47-1/2	20 x 57-1/4	25 x 45	22 x 56-3/4
Connection sizes—hot water outlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Connection sizes—hot water inlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
<b>POWER/RATINGS**</b>						
Burner BTU size (K)	34	34	38	40	40	40
Operating water pressure	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi
<b>WARRANTY</b>						
Parts warranty	8-year limited	8-year limited	12/10/8-year limited	12/10/8-year limited	10/8-year limited	12/10/8-year limited

\* Household sizing based on back-to-back showers, 8 minutes long.

\*\* Based on internal testing

## GE REALMAX ATMOSPHERIC LIQUID PROPANE WATER HEATERS



	GE				
	GP30S08BXR	GP30T08BXR	GP40S12BXR GP40S10BXR GP40S08BXR	GP40T12BXR GP40T10BXR GP40T08BXR	GP50T12BXR GP50T10BXR GP50T08BXR
Rated capacity (gallons)	30	30	40	40	50
Nominal capacity (gallons)	30	30	40	40	50
<b>FEATURES</b>					
Family size*	1-3	2-3	2-4	2-4	3-5+
Control type	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Self-diagnostic control	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED
Temperature setting	45-160° F Range	45-160° F Range	45-160° F Range	45-160° F Range	45-160° F Range
Temperature setting factory default	120° F	120° F	120° F	120° F	120° F
Drain valve type	Polymer	Polymer	Brass Polymer Polymer	Brass Polymer Polymer	Brass Polymer Polymer
<b>WEIGHTS &amp; DIMENSIONS</b>					
Approx. shipping weight (lbs.)	118	119	140	147	169
Height to water connection (in.)	47-1/5	58-1/5	49-1/4	58-9/10	58-1/3
Tank dimensions (diameter x height) (in.)	20 x 45-1/2	18 x 56-1/2	22 x 47-1/2	20 x 57-1/4	22 x 56-3/4
Connection sizes—hot water outlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"
Connection sizes—hot water inlet (mnpt)	3/4"	3/4"	3/4"	3/4"	3/4"
<b>POWER/RATINGS**</b>					
Burner BTU size (K)	31	28	34	36	36
Operating water pressure	20-125 psi	20-125 psi	20-125 psi	20-125 psi	20-125 psi
<b>WARRANTY</b>					
Parts warranty	8-year limited	8-year limited	12/10/8-year limited	12/10/8-year limited	12/10/8-year limited

\* Household sizing based on back-to-back showers, 8 minutes long.

\*\* Based on internal testing