

GE APPLIANCES

RealMAX

RESIDENTIAL ATMOSPHERIC LOW NO_x &
ULTRA LOW NO_x GAS WATER HEATERS

2024 PRODUCT GUIDE



GE APPLIANCES
a Haier company

AIR & WATER
SOLUTIONS




Scan here to learn
more about the
full line of water
heater solutions

GE RealMAX ATMOSPHERIC GAS WATER HEATERS: MAXIMUM BENEFITS



GE APPLIANCES

A BRAND WITH A HERITAGE
Consumers know and trust GE Appliances for durability, quality, and innovation.

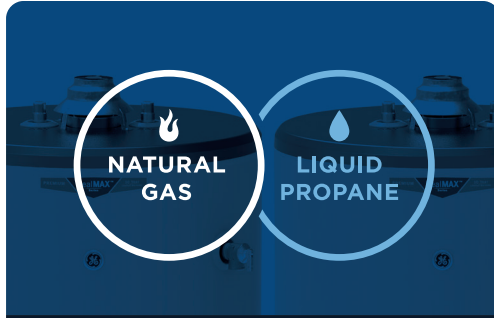


NATURAL GAS **LIQUID PROPANE**

A CHOICE OF POWER SOURCES
Natural gas or liquid propane.




LOW NOx
ULTRA LOW NOx

BURNER OPTIONS
Low NOx—The most common gas water heater burner.
Ultra Low NOx—Lower emissions environmentally friendly burner. Meets requirements for California & Utah.



REAL CAPACITY AND PERFORMANCE

A true 30, 40, and 50 gallons of hot water. 40K BTUs on select 40- and 50-gallon natural gas units provide quick recovery and maximum performance.



MAXIMIZED DISTRIBUTION NETWORK

GE Appliances' unparalleled network offers maximized supply-chain efficiencies.



SUPPORT TO THE MAX

Our commitment to the industry means that we want you to succeed — and through top-notch customer support and training, we aim to be your partner for the long haul.

INNOVATION TO THE MAX


GE Appliances' investment in the future includes a \$70 million, 259,000-square-foot, high-volume water heater production facility in Camden, South Carolina. It's the first new tank-style water heater plant built in the U.S. in more than 30 years, and it's driven by cutting-edge technology. RealMAX gas water heaters are made in the USA*, by GE Appliances experts, in this state-of-the-art facility.



* 70-90% US content

TANK FEATURES


MADE IN AMERICA
 70-90% U.S. CONTENT | GEAPPLIANCES.COM/USA

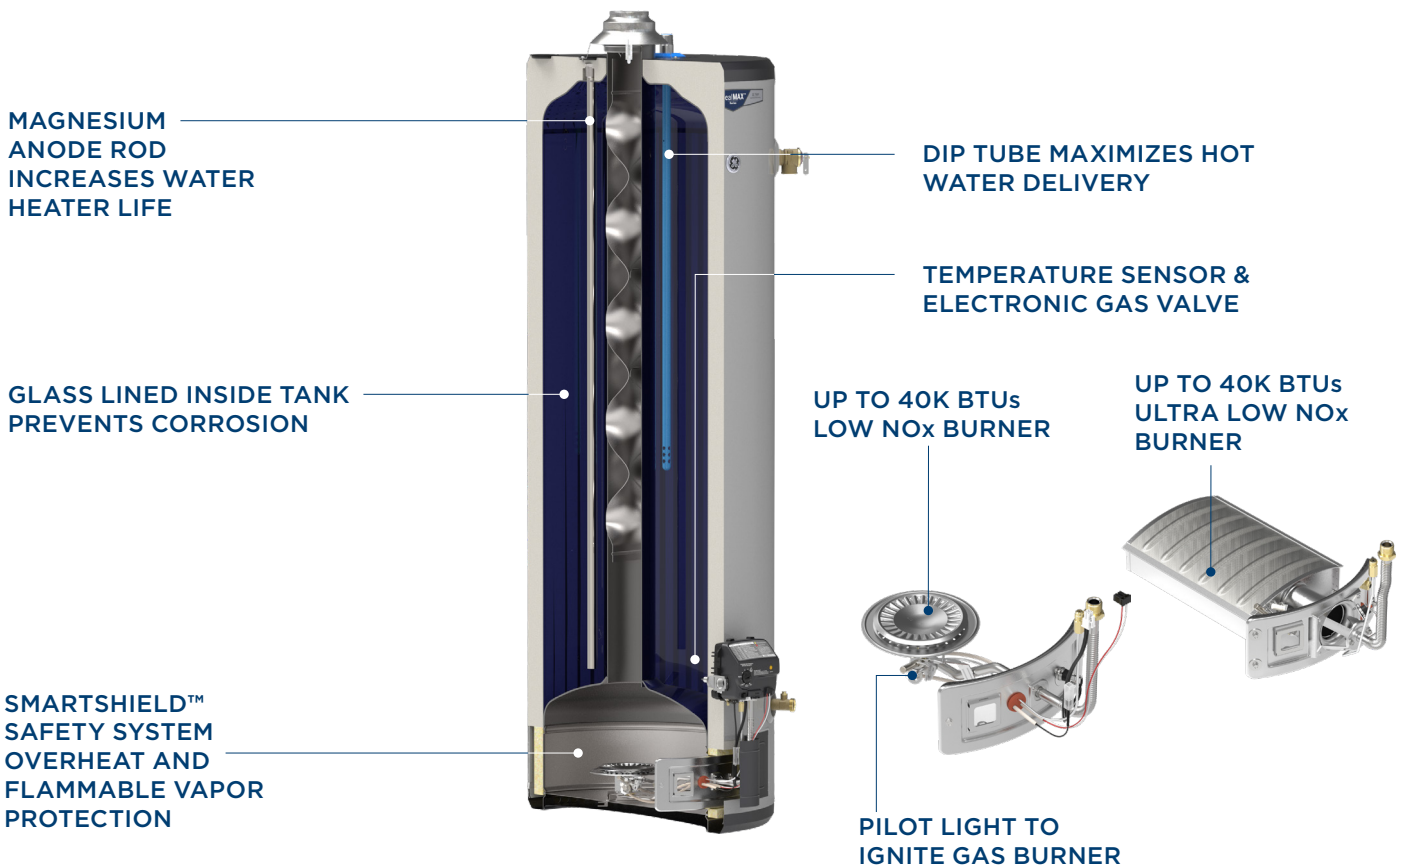

* We have a running change to replace all glass filled nylon drain valves to brass drain valves.

ATMOSPHERIC GAS FEATURE HIGHLIGHTS



REAL CAPACITY MAXIMUM PERFORMANCE

The products in the RealMAX series are real-capacity heaters - they actually contain the water volume they claim. They hold a true 30, 40 and 50 gallons of water - plus quick recovery (40K BTUs on select 40/50G natural gas units).



LEADING WARRANTIES

RealMAX water heaters carry tank and parts limited warranties of 8 years (Choice model), 10 years (Premium model), and 12 years (Platinum model). Compare that with most standard warranties, which run 6, 9, and 12 years.



BURNER OPTIONS

Low NOx—The most common gas water heater burner.

Ultra Low NOx—Lower emissions environmentally friendly burner. Meets requirements for California & Utah.



CONTROLS DESIGNED FOR PEACE OF MIND

RealMax series water heaters have safety built in. The SmartShield™ system automatically shuts off the unit if abnormal ambient temperatures are detected, and the self-diagnostic feature reports on gas system status via an LED indicator.



GE APPLIANCES RealMAX HAS ARRIVED— BRINGING THE GE APPLIANCES ADVANTAGE WITH IT

The atmospheric gas water heaters in the GE RealMAX series are cutting-edge products that give families real capacity and maximum performance, and give professionals the kind of support that only GE Appliances can offer. With a distribution network second to none and a training and customer-service team dedicated to making your life easier, RealMAX is a game changer.

ATMOSPHERIC LOW NO_x GAS SPECIFICATIONS

GE REALMAX ATMOSPHERIC LOW NO_x NATURAL GAS WATER HEATERS



GE						
	GG30S08BXR	GG30T08BXR	GG40S12BXR GG40S10BXR GG40S08BXR	GG40T12BXR GG40T10BXR GG40T08BXR	GG50S12BXR GG50S10BXR GG50S08BXR	GG50T12BXR GG50T10BXR GG50T08BXR
Rated + Nominal capacity (gallons)	30/30	30/30	40/40	40/40	50/50	50/50
FEATURES						
Family size*	1-3	2-3	2-4	2-4	3-5+	3-5+
Control type	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Self-diagnostic control	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED
Temperature range	50-155° F	50-155° F	50-155° F	50-155° F	50-155° F	50-155° F
Drain valve type	Brass	Brass	Brass	Brass	Brass	Brass
WEIGHTS & DIMENSIONS						
Approx. shipping weight (lbs.)	118	119	140	147	172	169
Height to water connection (in.)	48-3/8	59-1/4	50-3/8	60	47-3/4	59-1/2
Tank dimensions (diameter x height) (in.)	20 x 46-7/8	18 x 57-3/4	22 x 48-7/8	20 x 58-1/2	25 x 46-1/4	22 x 58
Connection sizes - cold water inlet/hot water outlet (MNPT)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS**						
Input BTU/hr	34k	34k	38k	40k	40k	40k
First hour rating (gallons)	64	62	78	83	77	82
Uniform energy factor	0.6	0.6	0.64	0.64	0.63	0.64
WARRANTY						
Limited warranty	8-year limited	8-year limited	12/10/8-year limited	12/10/8-year limited	12/10/8-year limited	12/10/8-year limited

* Household sizing based on back-to-back showers, 8 minutes long.

** Certified by AHRI testing

Temperature setting factory default 120°F

GE REALMAX ATMOSPHERIC LOW NO_x LIQUID PROPANE WATER HEATERS



GE					
	GP30S08BXR	GP30T08BXR	GP40S12BXR GP40S10BXR GP40S08BXR	GP40T12BXR GP40T10BXR GP40T08BXR	GP50T12BXR GP50T10BXR GP50T08BXR
Rated + Nominal capacity (gallons)	30/30	30/30	40/40	40/40	50/50
FEATURES					
Family size*	1-3	2-3	2-4	2-4	3-5+
Control type	Thermostat	Thermostat	Thermostat	Thermostat	Thermostat
Self-diagnostic control	Yes—LED	Yes—LED	Yes—LED	Yes—LED	Yes—LED
Temperature range	50-155° F	50-155° F	50-155° F	50-155° F	50-155° F
Drain valve type	Brass	Brass	Brass	Brass	Brass
WEIGHTS & DIMENSIONS					
Approx. shipping weight (lbs.)	118	119	140	147	169
Height to water connection (in.)	48-3/8	59-1/4	50-3/8	60	59-1/2
Tank dimensions (diameter x height) (in.)	20 x 46-7/8	18 x 57-3/4	22 x 48-7/8	20 x 58-1/2	22 x 58
Connection sizes - cold water inlet/hot water outlet (MNPT)	3/4"	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS**					
Input BTU/hr	31.5k	28k	34.5k	36k	36k
First hour rating (gallons)	64	52	78	83	82
Uniform energy factor	0.6	0.6	0.64	0.64	0.64
WARRANTY					
Limited warranty	8-year limited	8-year limited	12/10/8-year limited	12/10/8-year limited	12/10/8-year limited

* Household sizing based on back-to-back showers, 8 minutes long.

** Certified by AHRI testing

Temperature setting factory default 120°F



Listed by Underwriters Laboratories



Certified to NSF/ANSI 372

See http://info.nsf.org/CertifiedLead_Content/ for specific model listing.



MADE IN AMERICA
70-90% U.S. CONTENT | GEAPPLIANCES.COM/USA

ATMOSPHERIC ULTRA LOW NO_x SPECIFICATIONS

GE REALMAX ATMOSPHERIC ULTRA LOW NO_x WATER HEATERS



GE	GG40S12DXV GG40S10DXV GG40S08DXV	GG40T12DXV GG40T10DXV GG40T08DXV	GG50S12DXV GG50S10DXV GG50S08DXV	GG50T12DXV GG50T10DXV GG50T08DXV
Rated + Nominal capacity (gallons)	40 / 40	40 / 40	50 / 50	50 / 50
FEATURES				
Family size*	2-4	2-4	3-5+	3-5+
Control type	Thermostat	Thermostat	Thermostat	Thermostat
Self-diagnostic control	Yes—LED	Yes—LED	Yes—LED	Yes—LED
Temperature range	50-155° F	50-155° F	50-155° F	50-155° F
Drain valve type	Brass	Brass	Brass	Brass
WEIGHTS & DIMENSIONS				
Approx. shipping weight (lbs.)	142	149	174	171
Height to water connection (in.)	50-3/8	60	47-3/4	59-1/2
Tank dimensions (diameter x height) (in.)	22 x 48-7/8	20 x 58-1/2	25 x 46-1/4	22 x 58
Connection sizes - cold water inlet/hot water outlet (MNPT)	3/4"	3/4"	3/4"	3/4"
POWER/RATINGS**				
Input BTU/hr est.	40k	40k	40k	40k
First hour rating est. (gallons)	78	83	77	82
Uniform energy factor est.	0.64	0.64	0.63	0.63
WARRANTY				
Limited warranty	12/10/08-year limited	12/10/08-year limited	12/10/08-year limited	12/10/08-year limited

* Household sizing based on back-to-back showers, 8 minutes long.

** Certified by AHRI testing
Temperature setting factory default 120°F



Listed by
Underwriters
Laboratories



Certified to
NSF/ANSI 372

See http://info.nsf.org/Certified/Lead_Content/
for specific model listing



**MADE IN
AMERICA**
70-90% U.S. CONTENT | GEAPPLIANCES.COM/USA



GE APPLIANCES

GE is a trademark of the General Electric Company
Manufactured under trademark license.

Appliance Park
Louisville, KY 40225
geappliancesairandwater.com
Pub No. 27-D0040-24
OTGEA5535096342