



GE APPLIANCES
a Haier company

AIR & WATER SOLUTIONS

RealMAX 4500W Electric Water Heaters

KEY FEATURES

REAL CAPACITY

Get the most from the only water heater that holds a true capacity of hot water compared to electric steel tank water heaters per DOE rated gallon capacity on tall and short models.*

MAXIMUM PERFORMANCE

Live comfortably with this best in class water heater that delivers up to 63 gallons of hot water in the first hour of use measured through DOE First Hour Rating.

ANODE ROD

Durable magnesium design offers long-lasting protection against corrosion to extend the life of your water heater tank.

4500W HEATING ELEMENTS

Two 4500W heating elements offers the flexibility to be installed on a 30-amp or 25-amp breaker.

BRASS DRAIN VALVE

Rust-proof brass valve with 1/4" turn ball construction can be counted on to provide long-lasting service.**

EASY INSTALLATION

Replace your old water heater quickly and easily using standard water and electric connections. T&P relief valve factory installed.

LEADING WARRANTY

RealMAX water heaters carry an 8-year tank and parts limited warranty.



Certified to
NSF/ANSI 372

See http://info.nsf.org/Certified/Lead_Content/
for specific model listing



Listed by
Underwriters
Laboratories



Scan here to learn
more about the
full line of water
heater solutions

Visit geappliancesairandwater.com for more details.

*Compared to other electric steel tank-style water heaters per DOE-rated gallon capacity.

**We have a running change to replace all glass filled nylon drain valves with brass drain valves..




SPECIFICATION DETAILS

							Dimensions in Inches Approx.						
							A	B	C	D	E		
Model Number	Nominal Capacity (Gallons)	Rated Storage	First Hour Rating (Gallons)	Uniform Energy Factor Min	Recovery @ 90°F Gallon per Hour	Element Wattage	Floor to top of Tank Height	Floor to T&P Relief Valve	Product Body Diameter/ Width	Hot to Cold Water Connections	Floor to top of Inlet/ Outlet Connections Height	Product Weight (lbs) est.	Shipping Weight (lbs) est.
Short Models													
GE40S08DAT	40	40	63	0.92	21	4,500	51-3/8	42-7/8	22	8	52-7/8	121	133
Tall Models													
GE40T08DAT	40	40	57	0.92	21	4,500	64	56	20	8	65-1/2	127	139
Lowboy Models Top Part													
GE40L08DAT	40	36	56	0.92	21	4,500	32-3/4	22-5/8	27	8	34-1/4	135	145

Water connections are 3/4".

Dimensions and specifications are subject to change without notice.

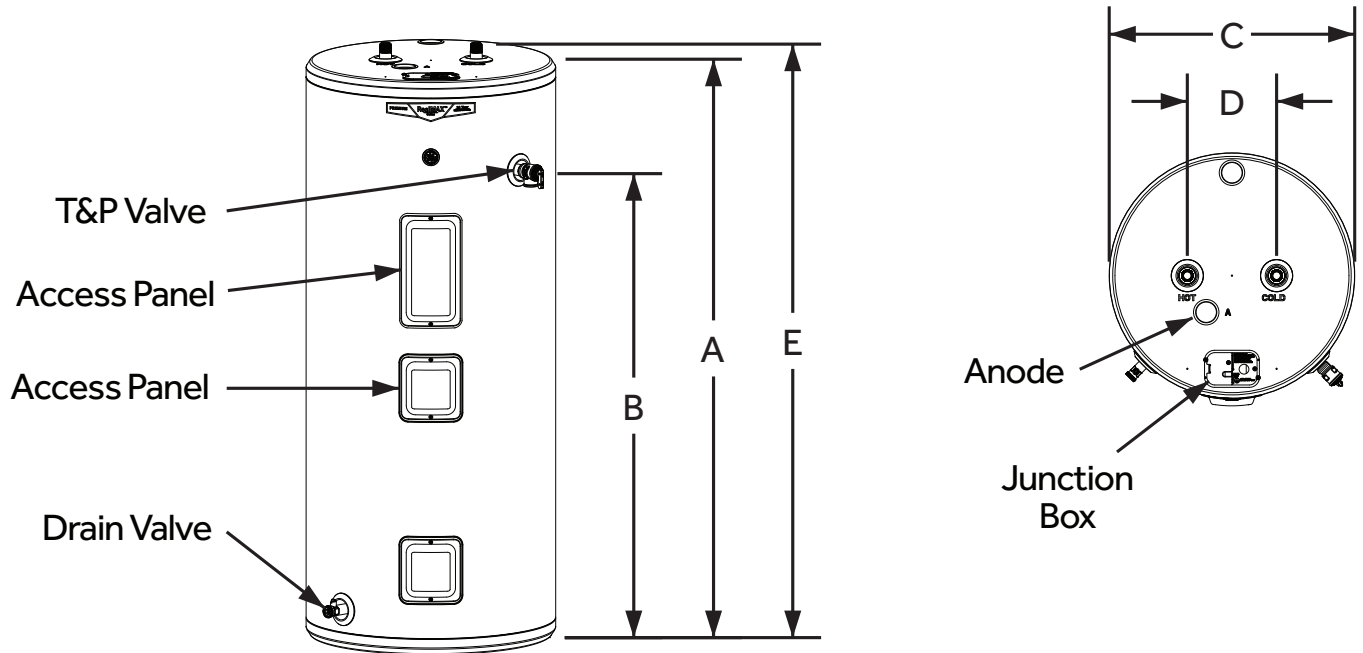

Illustrations are intended for dimensional reference only.
Refer to photograph for actual product appearance

Local Installation Regulations:

This water heater must be installed in accordance with these instructions, local codes, utility codes, utility company requirements or, in the absence of local codes, the latest edition of the National Electrical Code. It is available from some local libraries or can be purchased from the National Fire Prevention Association, Batterymarch park, Quincy, MA 02169 as booklet ANSI/ NFPA 70