



GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS

SmartSERIES Electric Water Heaters

KEY FEATURES

REAL CAPACITY

Get the most from the only water heater that holds a true capacity of hot water compared to electric steel tank water heaters per DOE rated gallon capacity on tall and short models.*

MAXIMUM PERFORMANCE

Live comfortably with this best in class water heater that delivers up to 78 gallons of hot water in the first hour of use measured through DOE First Hour Rating.

BUILT-IN-WIFI

Easily adjust temperatures, set vacation mode schedules, and receive notifications with built-in WiFi powered by SmartHQ.

ANODE ROD

Durable magnesium design offers long-lasting protection against corrosion to extend the life of your water heater tank.

QUICK RECOVERY

Two 5500W heating elements quickly increase hot water.

BRASS DRAIN VALVES

Rust-proof brass valve with 1/4" turn ball construction can be counted on to provide long-lasting service.**

EASY INSTALLATION

Replace your old water heater quickly and easily using standard water and electric connections. Quick electronic connectors are provided with full instructions. T&P relief valve factory installed.

LEADING WARRANTY

RealMAX water heaters carry an 10-year or 12-year tank and parts limited warranty.



Certified to
NSF/ANSI 372
See http://info.nsf.org/Certified/Lead_Content/ for specific model listing



Listed by
Underwriters
Laboratories



Scan here to learn
more about the
full line of water
heater solutions.
Visit geappliancesairandwater.com for more details.

*Compared to other electric steel tank-style water heaters per DOE-rated gallon capacity.

**We have a running change to replace all glass filled nylon drain valves with brass drain valves.

SPECIFICATION DETAILS

Model Number	Nominal Capacity (Gallons)	Rated Storage	First Hour Rating (Gallons)	Uniform Energy Factor Min	Recovery @ 90°F Gallon per Hour	Element Wattage	Floor to top of Tank Height	Dimensions in Inches Approx.					Product Weight (lbs) est.	Shipping Weight (lbs) est.
								A	B	C	D	E		
Short Models														
GE30S10BLM*	30	30	60	0.92	25	5,500	40-3/8	31-7/8	22	8	41-7/8	101	111	
GE40S10BLM*	40	40	65	0.92	25	5,500	51-3/8	42-7/8	22	8	52-7/8	121	133	
GE50S10BLM*	50	50	75	0.93	25	5,500	51-1/2	42-5/8	24	8	53	150	161	
Tall Models														
GE30T10BLM*	30	30	59	0.92	25	5,500	49-7/8	41-3/4	20	8	51-3/8	104	113	
GE40T10BLM*	40	40	66	0.92	25	5,500	64	56	20	8	65-1/2	127	139	
GE50T10BLM*	50	50	78	0.93	25	5,500	62-1/4	53-7/8	22	8	63-3/4	142	154	


*Change 10 to 12 for 12 year tank and parts warranty.

10 & 12 year models feature a brass drain valve.

(We have a running change to replace all glass filled nylon drain valves with brass drain valves.)

Water connections are 3/4".

Dimensions and specifications are subject to change without notice.

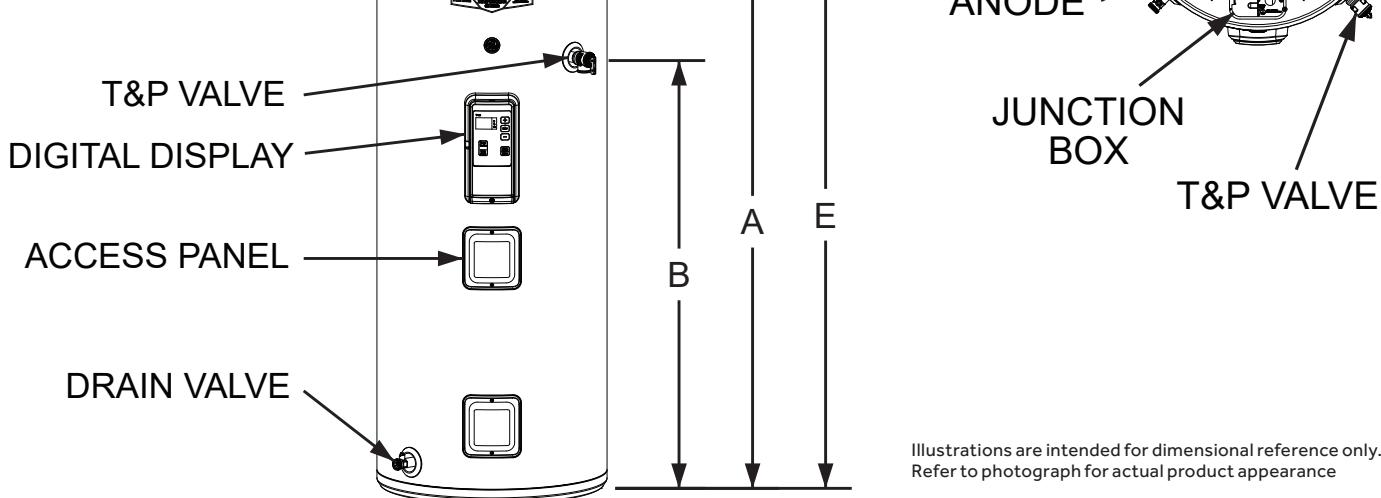

Local Installation Regulations:

This water heater must be installed in accordance with these instructions, local codes, utility codes, utility company requirements or, in the absence of local codes, the latest edition of the National Electrical Code. It is available from some local libraries or can be purchased from the National Fire Prevention Association, Batterymarch park, Quincy, MA 02169 as booklet ANSI/NFPA 70