



GE APPLIANCES
a Haier company

AIR&WATER
SOLUTIONS

RealMAX Standard Electric Water Heaters

KEY FEATURES

REAL CAPACITY

Get the most from the only water heater that holds a true capacity of hot water compared to electric steel tank water heaters per DOE rated gallon capacity on tall and short models.*

MAXIMUM PERFORMANCE

Live comfortably with this best in class water heater designed to provide hot water for the entire family.

ANODE ROD

Durable magnesium design offers long-lasting protection against corrosion to extend the life of your water heater tank.

QUICK RECOVERY

Two 3000W heating elements quickly increase hot water.

DRAIN VALVE

Rust-proof construction can be counted on to provide long-lasting service.**

EASY INSTALLATION

Replace your old water heater quickly and easily using standard water and electric connections. Quick electronic connectors are provided with full instructions. T&P relief valve factory installed.

LEADING WARRANTY

RealMAX water heaters carry an 8-year tank and parts limited warranty.



Certified to
NSF/ANSI 372
See http://info.nsf.org/Certified_Lead_Content/
for specific model listing



Listed by
Underwriters
Laboratories



Scan here to learn
more about the
full line of water
heater solutions

Visit geappliancesairandwater.com for more details.

*Compared to other electric steel tank-style water heaters per DOE-rated gallon capacity.

**We have a running change to replace all glass filled nylon drain valves with brass drain valves.




SPECIFICATION DETAILS

Model Number	Storage Capacity								Dimensions in Approximate Inches (IN) and Centimeters (CM)					Weight in Approximate Pounds (lbs) and Kilograms (kg)														
									A	B	C	D	E															
CE40S08CAW	Nominal Capacity (Gallons)	40	Rated Storage	40	Liters	151	Imperial Gallons	33	Standby Loss	55	Element Wattage	3,000	Warranty (Yrs)	8	Floor to top of Tank Height IN (CM)	51-3/8 (130.5)	Floor to T&P Relief Valve IN (CM)	42-7/8 (108.9)	Product Body Diameter/Width IN (CM)	22 (55.9)	Hot to Cold Water Connections Height IN (CM)	8 (20.32)	Floor to top of Inlet / Outlet Connections Height IN (CM)	52-7/8 (136.8)	Product Weight lbs (kg)	121 (54.9)	Shipping Weight lbs (kg)	133 (60.3)
CE50S08CAW	50	50	189	42	62	3,000	8	51-1/2 (130.8)	42-5/8 (108.2)	24 (61)	8 (20.32)	53 (134.6)	150 (68)	161 (73)														
Short Models																												
GE40T08CAR	40	40	151	33	55	3,000	8	64 (162.6)	56 (142.2)	20 (50.8)	8 (20.32)	65-1/2 (166.4)	127 (57.6)	139 (63)														
GE50T08CAR	50	50	189	42	62	3,000	8	62-3/8 (158.4)	53-7/8 (136.8)	22 (55.9)	8 (20.32)	63-7/8 (162.2)	142 (64.4)	154 (69.9)														
Tall Models																												

Water connections are 3/4".

Dimensions and specifications are subject to change without notice.

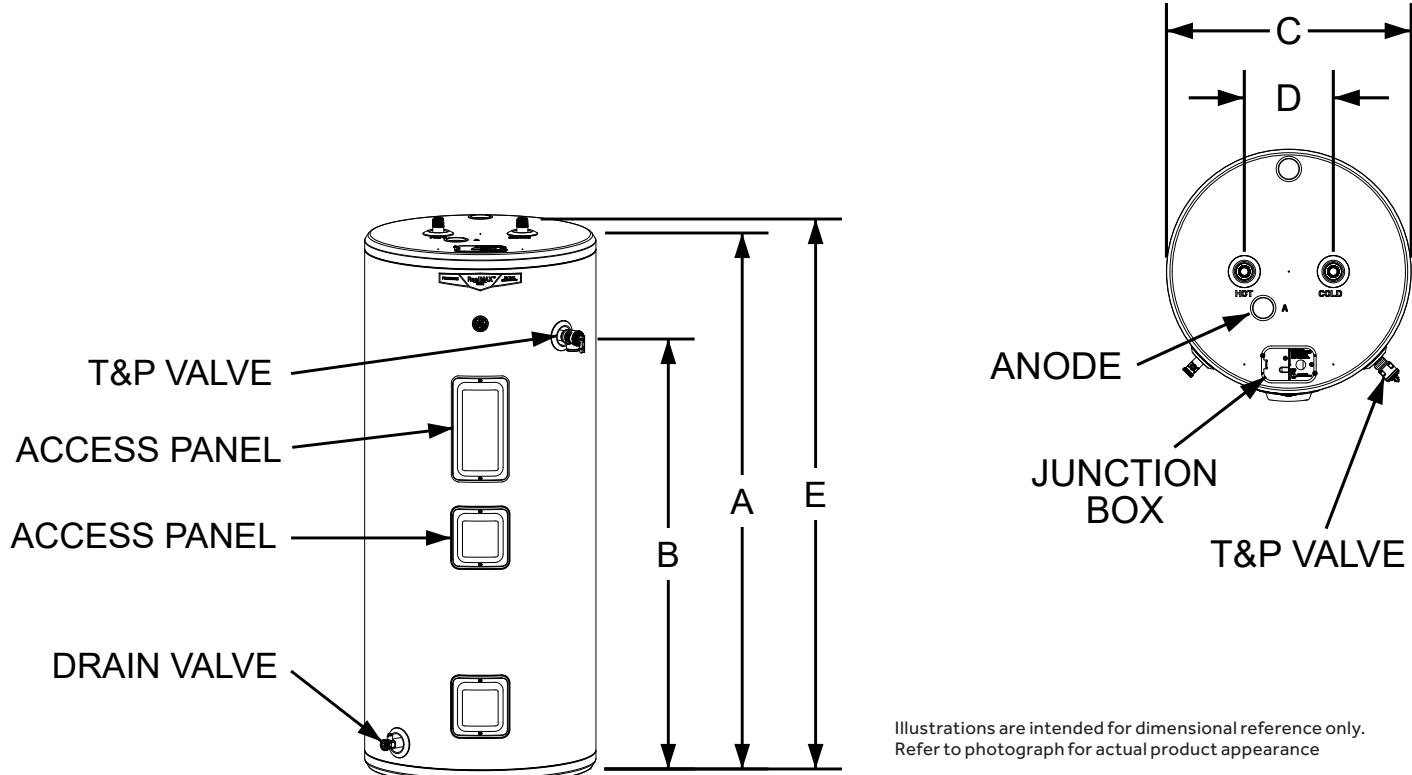

Illustrations are intended for dimensional reference only.
Refer to photograph for actual product appearance

Local Installation Regulations:

This water heater must be installed in accordance with these instructions, local codes, utility codes, utility company requirements or, in the absence of local codes, the latest edition of the National Electrical Code. It is available from some local libraries or can be purchased from the National Fire Prevention Association, Batterymarch park, Quincy, MA 02169 as booklet ANSI/NFPA 70

For technical information call 1-866-327-0832. GE Appliances reserves the right to make product changes or improvements without prior notice.